



## Prestel EHD-4K100L

18Gbps HDMI over HDBaseT Extender  
with Bi-directional IR (100M)



**USER MANUAL**

# Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## Table of Contents

|  |   |
|--|---|
| 1. Introduction.....                     | 1 |
| 2. Features.....                         | 1 |
| 3. Package Contents.....                 | 2 |
| 4. Specifications.....                   | 2 |
| 5. Operation Controls and Functions..... | 4 |
| 5.1 Transmitter Panel.....               | 4 |
| 5.2 Receiver Panel.....                  | 5 |
| 5.3 Audio Signal Output Switching.....   | 6 |
| 5.4 IR Pin Definition.....               | 7 |
| 6. Application Example.....              | 8 |

## 1. Introduction

This 18Gbps HDMI Extender can extend high definition video / audio signal, RS-232, bi-directional IR and internet signal, at the distance of up to 328ft / 100 meters between transmitter and receiver via a single CAT6/6a cable and support resolution up to 4K2K@60Hz 4:4:4. The transmitter supports ARC function and local audio extract. In addition, the extender is equipped with bi-directional IR pass-through which allows for source and display control. It also supports PoC function.

The extender offers the most convenient solution for HDMI extension via a single CAT cable with long distance capability, and is the perfect solution for any application.

## 2. Features

- ☆ HDCP 2.2 / 1.x and DVI 1.0 compliant
- ☆ Support 18Gbps video bandwidth
- ☆ Video resolution is up to 4k2k@60Hz YUV 4:4:4  
High bit rate audio transmission via HDMI
- ☆ The maximum transmission distance is 328ft / 100 meters via a single CAT6/6a cable
- ☆ Support PoC (Power over Cable) function
- ☆ Support ARC (Audio Return Channel) function
- ☆ Support bi-directional IR, RS-232 and LAN signal pass-through transmission
- ☆ HDR, HDR10+, Dolby Vision and HLG function supported
- ☆ Compact design for easy and flexible installation.

### 3. Package Contents

| Qty | Item  |
|-----|---|
| 1   | 18Gbps HDMI over HDBaseT Extender (Transmitter) |
| 1   | 18Gbps HDMI over HDBaseT Extender (Receiver)    |
| 1   | IR Blaster cable (1.5 meters)                   |
| 1   | 20~60KHz IR Receiver cable (1.5 meters)         |
| 4   | Mounting Ear                                    |
| 2   | 3-pin Phoenix connector                         |
| 1   | 24V/1A Locking Power adapter                    |
| 1   | User Manual                                     |
| 8   | Machine screw - KM3*4mm                         |

### 4. Specifications


| Technical           |   |
|---------------------|---|
| HDCP Compliance     | HDCP 2.2 / 1.x  |
| Video Bandwidth     | 18Gbps  |
| Video Resolution    | 4K2K 50/60Hz 4:4:4<br>4K2K 50/60Hz 4:2:2<br>4K2K 50/60Hz 4:2:0<br>4K2K 30Hz 4:4:4<br>1080p, 1080i, 720p, 720i, 480p, 480i<br>All PC resolutions including 1920 x 1200 |
| Color Space         | RGB / YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0   |
| Color Depth         | 8/10/12-bit (1080P60Hz, 4K30Hz, 4K60Hz YCbCr 4:2:2/4:2:0)<br>8-bit (4K60Hz 4:4:4 )  |
| HDMI Audio Formats  | LPCM 2.0/2.1/5.1/6.1/7.1, Dolby Digital, Dolby TrueHD, Dolby Digital Plus(DD+), DTS-ES, DTS HD Master, DTS HD-HRA, DTS-X  |
| L/R Audio Formats   | PCM 2.0   |
| SPDIF Audio Formats | LPCM2.0, Dolby Digital, Dolby Digital Plus, DTS   |
| ESD Protection      | Human body model — ±8kV (Air-gap discharge) & ±4kV (Contact discharge)  |

| <b>Connection</b>     |  |
|-----------------------|--|
| Transmitter           | Inputs: 1x HDMI Type A [19-pin female]<br>Outputs: 1x HDBT OUT [RJ45, 8-pin female]<br>1x SPDIF OUT [S/PDIF]<br>1x L/R OUT [3.5mm Stereo Mini-jack]<br>1x LAN [RG45]<br>Control: 1x IR IN [3.5mm Stereo Mini-jack]<br>1x IR OUT [3.5mm Stereo Mini-jack]<br>1x RS-232 [Phoenix jack]<br>1x SERVICE [Mini-USB, Update port] |
| Receiver              | Inputs: 1x HDBT IN [RJ45, 8-pin female]<br>1x SPDIF IN [S/PDIF]<br>Outputs: 1x HDMI Type A [19-pin female]<br>1x LAN [RG45]<br>Control: 1x IR IN [3.5mm Stereo Mini-jack]<br>1x IR OUT [3.5mm Stereo Mini-jack]<br>1x RS-232 [Phoenix jack]<br>1x SERVICE [Mini-USB, Update port]  |
| <b>Mechanical</b>     |  |
| Housing               | Metal Enclosure  |
| Color                 | Black  |
| Dimensions            | Transmitter / Receiver:<br>163mm [W] x 90mm [D] x 16mm [H]   |
| Weight                | Transmitter: 170g, Receiver: 165g  |
| Power Supply          | Input: AC 100 - 240V 50/60Hz<br>Output: DC 24V/1A (Locking connector)  |
| Power Consumption     | 13 W   |
| Operating Temperature | 32 - 104°F / 0 - 40°C  |
| Storage Temperature   | -4 - 140°F / -20 - 60°C  |
| Relative Humidity     | 20 - 90% RH (no condensation)  |
| <b>Resolution</b>     | <b>Distance</b>  |
| 4K2K                  | 296ft /90M   |
| 1080P                 | 328ft /100M  |

| Resolution / Cable Length   | 4K60 - Feet / Meters | 4K30 - Feet / Meters | 1080P60 - Feet / Meters |
|---|----------------------|----------------------|-------------------------|
| HDMI IN / OUT   | 16ft / 5M            | 32ft / 10M           | 50ft / 15M              |
| The use of "Premium High Speed HDMI" cable is highly recommended. |                      |                      |                         |

## 5. Operation Controls and Functions


### 5.1 Transmitter Panel

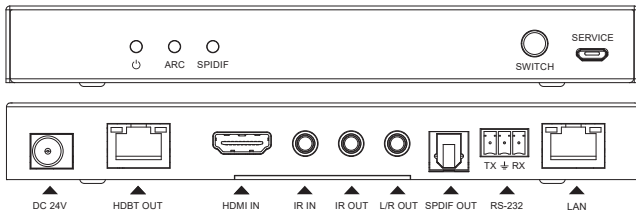

| Name         | Function Description  |
|--------------|---|
| Power LED    | Red LED is on when the transmitter is working.<br>LED is off when the transmitter is on standby.  |
| ARC LED      | Green LED is on when ARC function is turned on.   |
| SPIDIF LED   | Green LED is on when SPDIF OUT port outputs the the audio signal returned from SPDIF IN on receiver.  |
| SWITCH       | Press the button to switch the output audio signal source for SPDIF OUT and L/R OUT port.   |
| SERVICE port | Firmware update port.   |
| DC 24V       | DC 24V input for 24V 1A power adapter.<br><i>Note that the extender supports PoC function, it means that either transmitter or receiver is connected to 24V/1A power supply, the other doesn't need power supply.</i> |
| HDBT OUT     | RJ45 connector for connecting the HDBT IN port of receiver with CAT 6/6a cable.   |

|  |  |
|--|--|
| Connection Signal Indicator lamp<br><i>(on the left side of the HDBT OUT port)</i> | <ul style="list-style-type: none"> <li>• Illuminate: Transmitter and Receiver are in good connection status.</li> <li>• Flash: Transmitter and Receiver are in poor connection status.</li> <li>• Dark: Transmitter and Receiver are not connected.</li> </ul> |
| Data Signal Indicator lamp<br><i>(on the right side of the HDBT OUT port)</i>      | <ul style="list-style-type: none"> <li>• Illuminate: HDMI signal with HDCP.</li> <li>• Flash: HDMI signal without HDCP.</li> <li>• Dark: No HDMI signal.</li> </ul>  |
| HDMI IN  | HDMI source input.   |
| IR IN  | IR input port for receiving the signal of IR remote.   |
| IR OUT   | IR output port for control of source device. This IR output signal is from IR IN port of receiver.   |
| L/R OUT  | 3.5mm stereo connector for analog audio output.  |
| SPDIF OUT  | SPDIF connector for optical audio output.  |
| RS-232   | 3-pin Phoenix connector for RS-232 command transmission. The RS-232 command will pass-through from transmitter to receiver or receiver to transmitter.   |
| LAN  | RJ45 connector for connecting Hub or router.   |

## 5.2 Receiver Panel

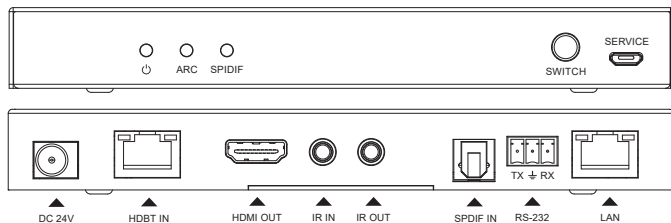

| Name      | Function Description  |
|-----------|---|
| Power LED | Red LED is on when the receiver is working. LED is off when the receiver is on standby. |
| ARC LED   | Green LED is on when ARC function is turned on.   |

|              |   |
|--------------|---|
| SPDIF LED    | Green LED is on when SPDIF OUT port outputs the the audio signal returned from SPDIF IN on receiver.  |
| SWITCH       | Press the button to switch the output audio signal source for SPDIF OUT and L/R OUT port.   |
| SERVICE port | Firmware update port.   |
| DC 24V       | DC 24V input for 24V 1A power adapter.<br><i>Note that the extender supports PoC function, it means that either transmitter or receiver is connected to 24V/1A power supply, the other doesn't need power supply.</i> |
| HDBT IN      | RJ45 connector for connecting the HDBT OUT port of transmitter with CAT 6/6a cable.   |
| HDMI OUT     | HDMI output for display.  |
| IR IN        | IR input port for receiving the signal of IR remote.  |
| IR OUT       | IR output port for control of display device. This IR output signal is from IR IN port of transmitter.  |
| SPDIF IN     | SPDIF connector for optical audio input.  |
| RS-232       | 3-pin Phoenix connector for RS-232 command transmission. The RS-232 command will pass-through from transmitter to receiver or receiver to transmitter.  |
| LAN          | Connect to Internet device such as PC or laptop.  |

### 5.3 Audio Signal Output Switching


Switch the output audio signal source for SPDIF OUT and L/R OUT port via the “Switch” button on the panel (the corresponding LED will illuminate). The states of ARC LED and SPDIF LED indicate the specific output audio signal source, as shown in the table below:

| ARC LED State | SPDIF LED State | Output Audio Signal Source for SPDIF OUT port and L/R OUT port   |
|---------------|-----------------|--|
| On            | Off             | The audio signal returned from HDMI (display device) on receiver |
| Off           | On              | The audio signal returned from SPDIF IN on receiver              |
| Off           | Off             | The audio signal extracted from the transmitter                  |



## 5.4 IR Pin Definition

IR Receiver and Blaster pin's definition is as below:

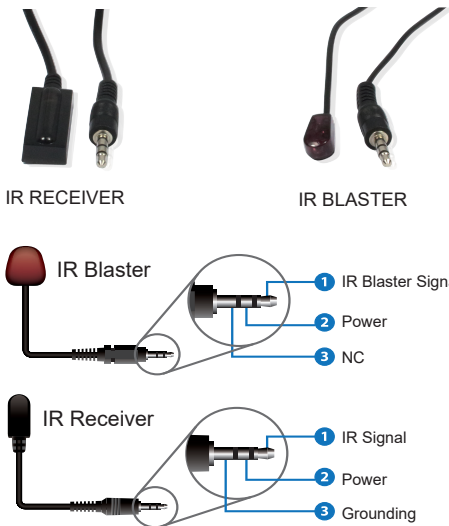

*Note: IR remote sends signal at the distance of 0~5 meters / 0~8 meters with the angle of  $\pm 45^\circ$  in vertical direction.*

## 6. Application Example

